

Marine GPS/ GLONASS Antenna

MODEL: MA-700GL

Marine navigation GPS/ GLONASS antenna that will sustain harsh environment.



- Low noise figure
- Fully 100% weather proof IPX8.
- Ultra-high Sensitivity
- Compact construction
- Excellent temperature stability
- FB3A SUS L-Mounting 1"-14 UNS

Specifications:


PHYSICAL CONDITION	
Constructions:	Polycarbonate radome, detachable cable/connector for easy mount, rubber-O-ring between top radome and screw base for waterproof
Dimensions:	90.5mm(Dia.) × 108.5mm(H)
Weight:	150grams (w/o cable & connector).
Color:	Standard in ivory white, other colours available upon request.
Base mounting	FB3A SUS L-MOUNTING 1"-14 UNS
Cable & Connector	
RF cable:	10 meter RG58
Pulling strength:	6 Kg @ 5sec. molded plastic on connector end for strain relief.
Connector	SMA(M) or TNC(M) or BNC(M) -----
Antenna Element	
Center Frequency:	1575Mhz & 1596-1610 MHz
Polarization:	R.H.C.P. (Right Handed Circular Polarization).
Bandwidth	10 MHz min. @S11≤-10 dB, 24MHz typ. @S11<-8dB
Gain @ 10° Elevation:	2 dBi typical.
Axial Ratio:	3 dB max.
Output VSWR:	1.5 max
Output Impedance:	50 ohm
Low Noise Amplifier	
Power Gain:	1570 Mhz : 29db typ

	1610 Mhz : 29db typ
Bandwidth:	50 MHz min.
Noise Figure:	1.5 typ
Outer Band Attenuation:	20 dB min. @ Fo +/-50 Mhz.
Supply Voltages:	2.3~5.5V DC.
Current Consumption:	2.5V : 6.6mA Typ. 3V: 8.6mA Typ. 4V: 12.6mA Typ. 5V: 16.6mA Typ.
Output Impedance:	50W ohm
Overall Performance: (antenna element, LNA & coax cable)	
Center Frequency:	1570 ~1610 Mhz.
Gain:	At 90° vertical to sky 30 ± 4.5dBi (cable loss) Note:1 Mounted on the 60mm x 60mm square ground plane
Noise Figure:	2.0 max.
Axial Ratio:	3 dB max.
Bandwidth:	10MHz min.
VSWR:	2.0 max.
Output Impedance:	50W ohm
Environmental	
Operating Temperature:	-40°C~ +85°C.
Storage Temperature:	-40°C~ +90°C.
Relative Humidity:	95% non-condensing.
Water Resistance:	100% waterproof.

* This specification is subject to change without prior notice

Data Updated: NOV.02, 2012



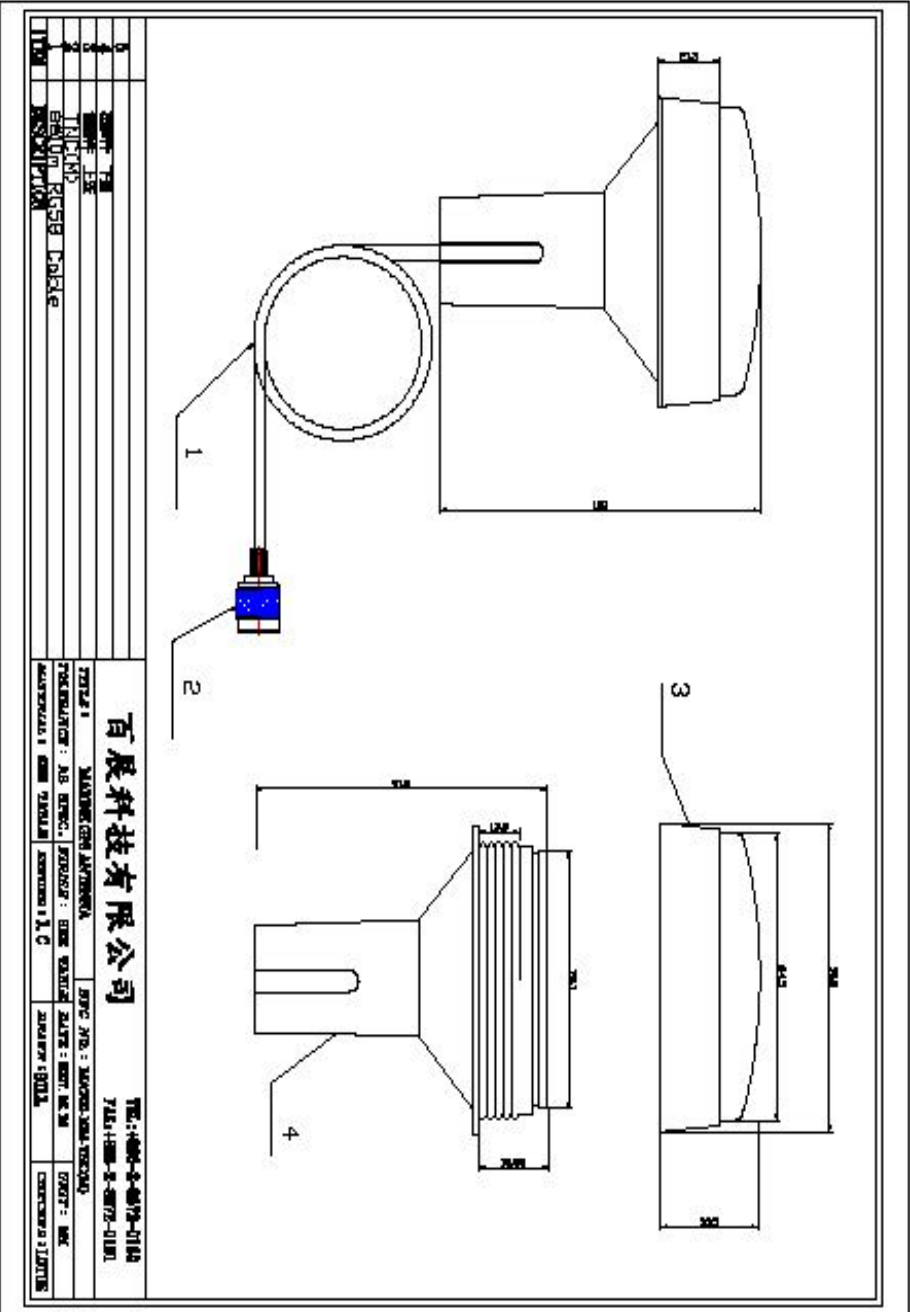

1	名称	真空炉	规格	Φ1000×1000
2	型号	WZ-1000	产地	中国
3	材料	不锈钢	重量	1000kg
4	用途	工业加热	功率	100kW
5	备注	其他说明		
6	日期	2023-10-27		
7	设计	XXX		
8	审核	XXX		
9	批准	XXX		
10	制图	XXX		


百展科技有限公司

TEL: 0512-8888-8888
FAX: 0512-8888-8888

地址: 江苏省苏州市工业园区
 电话: 0512-8888-8888
 传真: 0512-8888-8888
 邮编: 215128
 网址: www.baihan.com

Marine Antenna Base mounting

MODEL: FB-3A

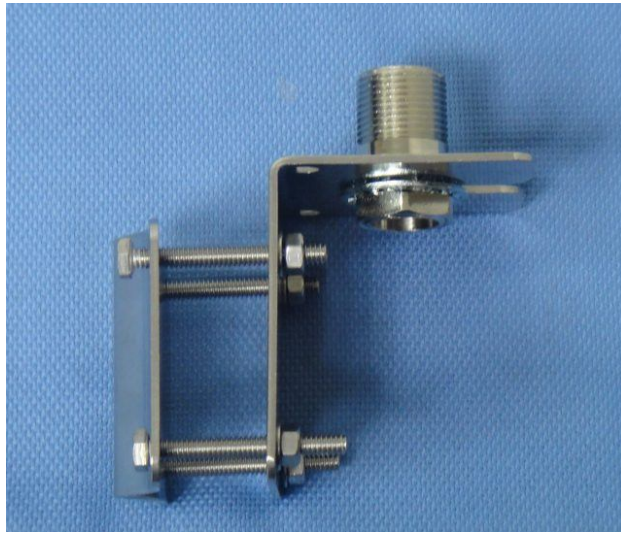

1"-14 UNS threaded mast SUS304/C3604

Locks on the truck rear-view mirror or on iron stand or flagpole

