

Marine GPS Receiver & Locator

MODEL: GM62UL

Small size and ruggedness, demand of vehicle locating and marine navigation GPS Receiver that will sustain harsh environment.



GM62L is a Mini Marine GPS receiver build-in well-known U-blox6 chipset. GM62L provides customer high position, velocity and time accuracy performances as well as high sensitivity and tracking capabilities. Customers benefit from the strength of both companies. Thanks to the low power consumption technology, the GPS-Mouse receiver is ideal for many portable applications such as PDA, Tablet PC, smart phone etc.

Features

- u-blox 6 solution
- 50-channel GPS
- SBAS (WAAS, EGNOS, MSAS, GAGAN)
- GALILEO Ready
- A-GPS
- UART, USB interface supported
- 25.0 x 25.0 x 4.0 mm patch antenna
- Wire-to-board connector
- RoHS compliant
- Water proof IP67

Applications

- Automotive
- Personal/Portable Navigation (PDA)
- Geographic Surveying
- Sports and Recreation
- Marine Navigation
- Fleet Management
- AVL and Location-Based Services

Technical Specifications


1. Electrical Characteristics

1.1 Chipset	u-Blox	ublox6
1.2 General	Frequency	L1 1575.42MHz GALILEO Open Service L1
1.3 Accuracy	Channels, C/A code	50 channels, C/A code
	Autonomous	2.5 meters
1.4 DGPS Accuracy	SBAS	2.0 meters
1.5 Acquisition Rate	Reacquisition	< 1 sec, typical
	Cold start	29 sec, typical
	Warm start	29 sec, typical
	Hot start	<1 sec, typical
1.6 Sensitivity	Tracking	-160dBm
	Acquisition/Reacquisition	-147dBm
1.7 Dynamic Condition	Altitude	50,000 meters max.
	Velocity	500 meters /sec max.
1.8 Power	Main Power	5.0 VDC +/- 0.5%
	Supply current	
	Tracking	75 mA
	Acquisition	95 mA
1.9 Serial Port	Electrical interface	UART
	Protocols	
	NMEA-0183	8 data bits, no parity, 1 stop bits 4800 bps
		GSV,RMC,GSA,GGA,VTG,ZDA
	UBX (ublox proprietary)	57600 bps
	Baud Rate	4800/9600/19200/115200
2. Environmental Characteristics		
2.1 Temperature	Operating range	-40 °C to + 85 °C
2.2 Mechanical dimensions	L x W x H	60mm(Dia.) x 18.5mm(H)
	Weight:	65grams (w/o cable & connector).
2.3 Interface	I/O connector	UART RS232
2.4 CABLE	UL2464/26Awg -0.5M-PS2(M) or 5M-M12(F) or ----	
2.5 Base mounting	Bulkhead mount with 0.8 inch threaded wing nut (standard accessory) FB6 2.5mm SUS L-Mounting	
2.6 Water Proof	IP67	
2.7 Color:	Standard in ivory white, other colours available upon request.	

All specifications are subject to change without notice



Pin Assignment of standard PS2 male Din Jack

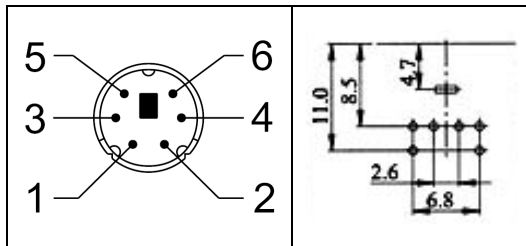

Pin	Signal
1	GND
2	+5V
3	N.C.(RS-232_Rx on demand)
4	TTL_RX
5	N.C.(RS-232_Tx on demand)
6	TTL_TX

Optional RS232 Interface cable & Power cable :

Model : GM62A

Model : GM62B


Model : GM62C



Power cable 12~40V to 5V



Pin Assignment of D-SUB 9 PIN Female connector

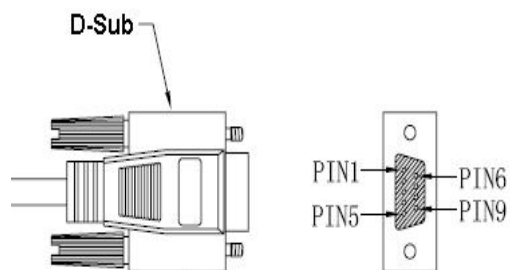

GM62A			GM62B		GM62C
DB9(F) – RS232 & Power cable			OPEN – RS232 & Power cable		DB9
PIN1	N.C	VCC 12~40V to 5V	Red	Vcc	VCC 5V
PIN2	RS232-TX		Green	RS232-TX	RS232-TX
PIN3	RS232-RX		White or Blue	RS232-RX	RS232-RX
PIN4	N.C.		Yellow	TTL - TX	N.C.
PIN5	GND	GDN	Orange	TTL - RX	GND
PIN6	N.C.		Black	GND	N.C.
PIN7	N.C.		Shielded wire	GND	N.C.
PIN8	N.C.				N.C.
PIN9	N.C.				N.C.

Output NMEA Messages

Table 3 NMEA-0183 V2.3 Output Messages

NMEA Sentence	Description
GGA (default)	Global Positioning System Fixed Data
GLL	Geographic Position - Latitude/Longitude
GSA (default)	GNSS DOP and Active Satellites
GSV (default)	GNSS Satellites in View
RMC (default)	Recommended Minimum Specific GNSS data
VTG (default)	Course Over Ground and Ground Speed
ZDA (default)	Time and Date