

Omni Directional Antenna

for 802.11a/b/g Version 1

TH-2458A

Electrical Specification:

Frequency	2.4~2.5/5.1~5.9GHz
Part Number	TH-2458A
Polarization	Linear
V.S.W.R.	1 : 1.5 Max
Impedance	50 OHMS $\pm 5 \Omega$
Gain	4/7 dBi
Power handling	10W Max
Front to back ratio	N/A
HPBW / horizontal	360°
HPBW / vertical	10/8°
Rated Wind	3.0 lbs. (1.4 kg)
Operating Temperature	-20°C~60°C

MECHANICAL SPECIFICATION

Connector Type	N Type Female
Length	70 x 260mm
Weight	245 g
Radome color	white
Radome material	glass fiber


Omni Directional Antenna

for 802.11a/b/g Version 1

TH-2458A

S11 FORWARD REFLECTION

LOG MAGNITUDE REF=0.000 dB 10.000 dB/DIV

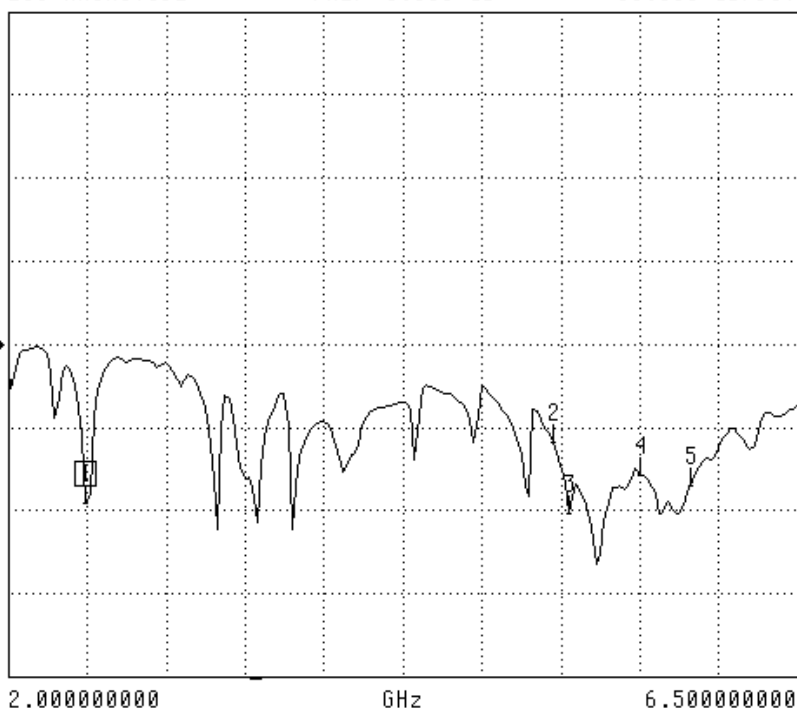

CH 1 - S11
REFERENCE PLANE
0.0000 mm

MARKER 1
2.450000000 GHz
-19.082 dB


MARKER TO MAX
MARKER TO MIN

- 2 5.105000000 GHz
-11.752 dB
- 3 5.195000000 GHz
-20.396 dB
- 4 5.600000000 GHz
-15.743 dB
- 5 5.892500000 GHz
-17.010 dB

MARKER READOUT
FUNCTIONS

S11 FORWARD REFLECTION

SWR REF=0.000 pU 10.000 U/DIV

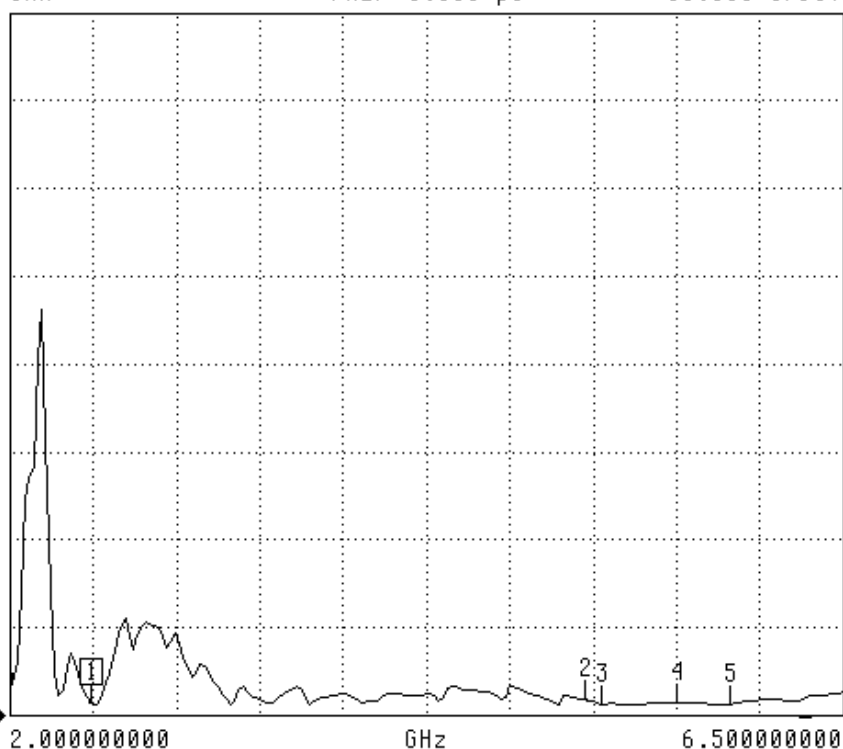

CH 1 - S11
REFERENCE PLANE
0.0000 mm

MARKER 1
2.450000000 GHz
1.325 U

MARKER TO MAX
MARKER TO MIN

- 2 5.105000000 GHz
1.705 U
- 3 5.195000000 GHz
1.234 U
- 4 5.600000000 GHz
1.435 U
- 5 5.892500000 GHz
1.168 U


MARKER READOUT
FUNCTIONS

Omni Directional Antenna

for 802.11a/b/g Version 1

TH-2458A

H-PLANE FIELD PATTERNS for 2.4G

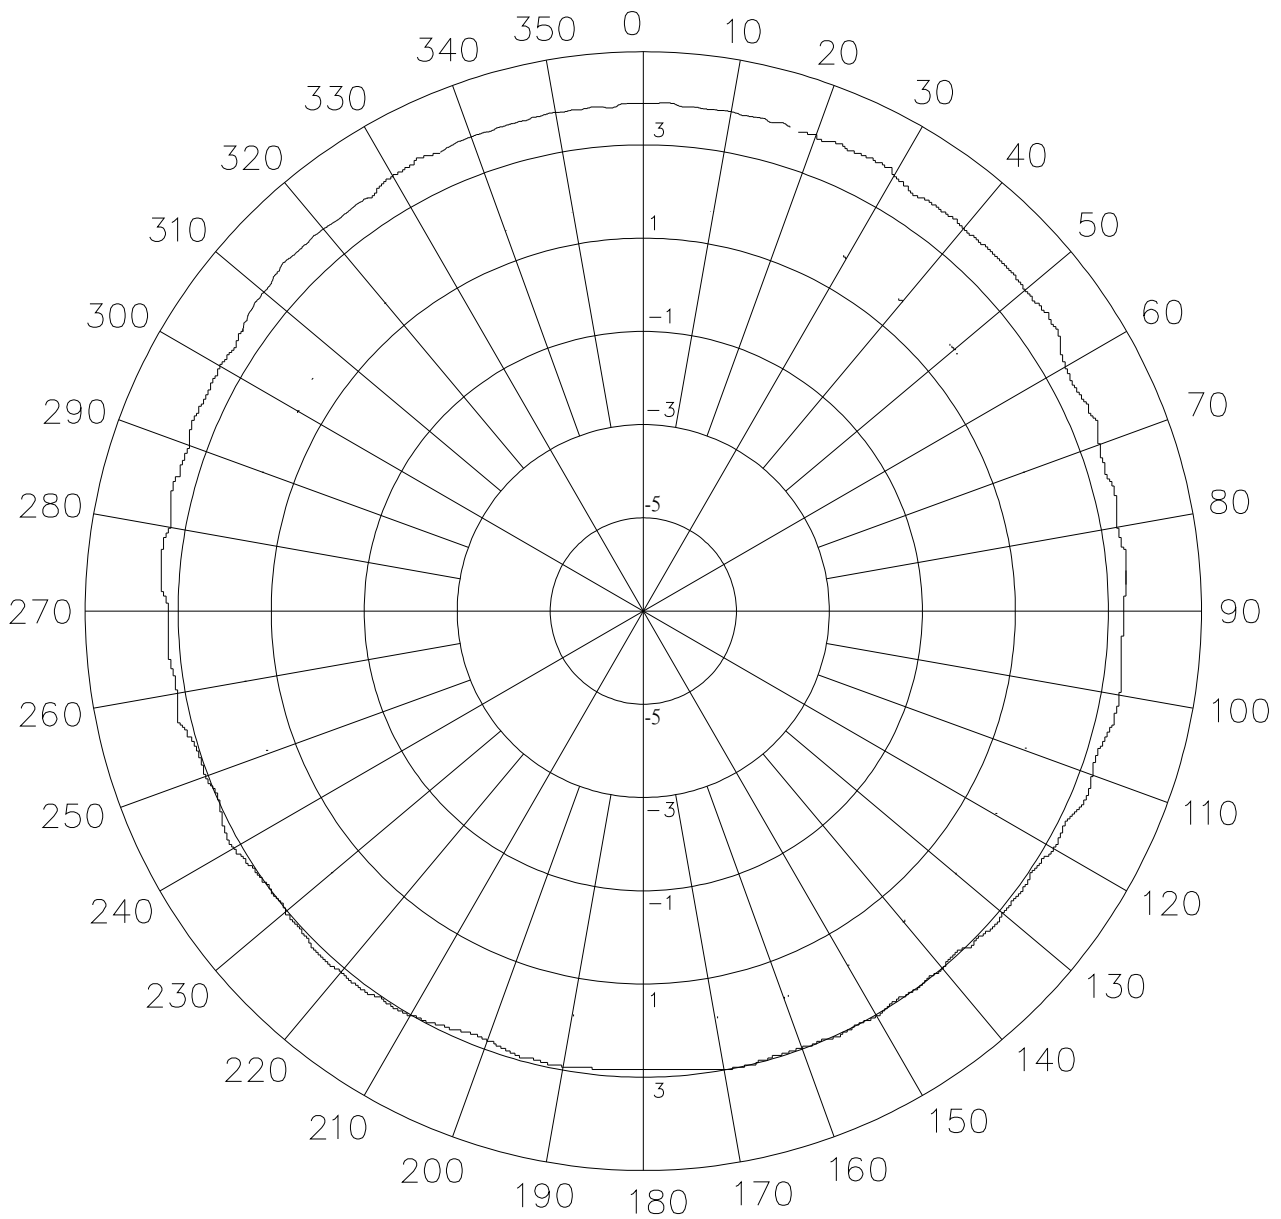


Omni Directional Antenna

for 802.11a/b/g Version 1

TH-2458A

E-PLANE FIELD PATTERNS for 2.4G

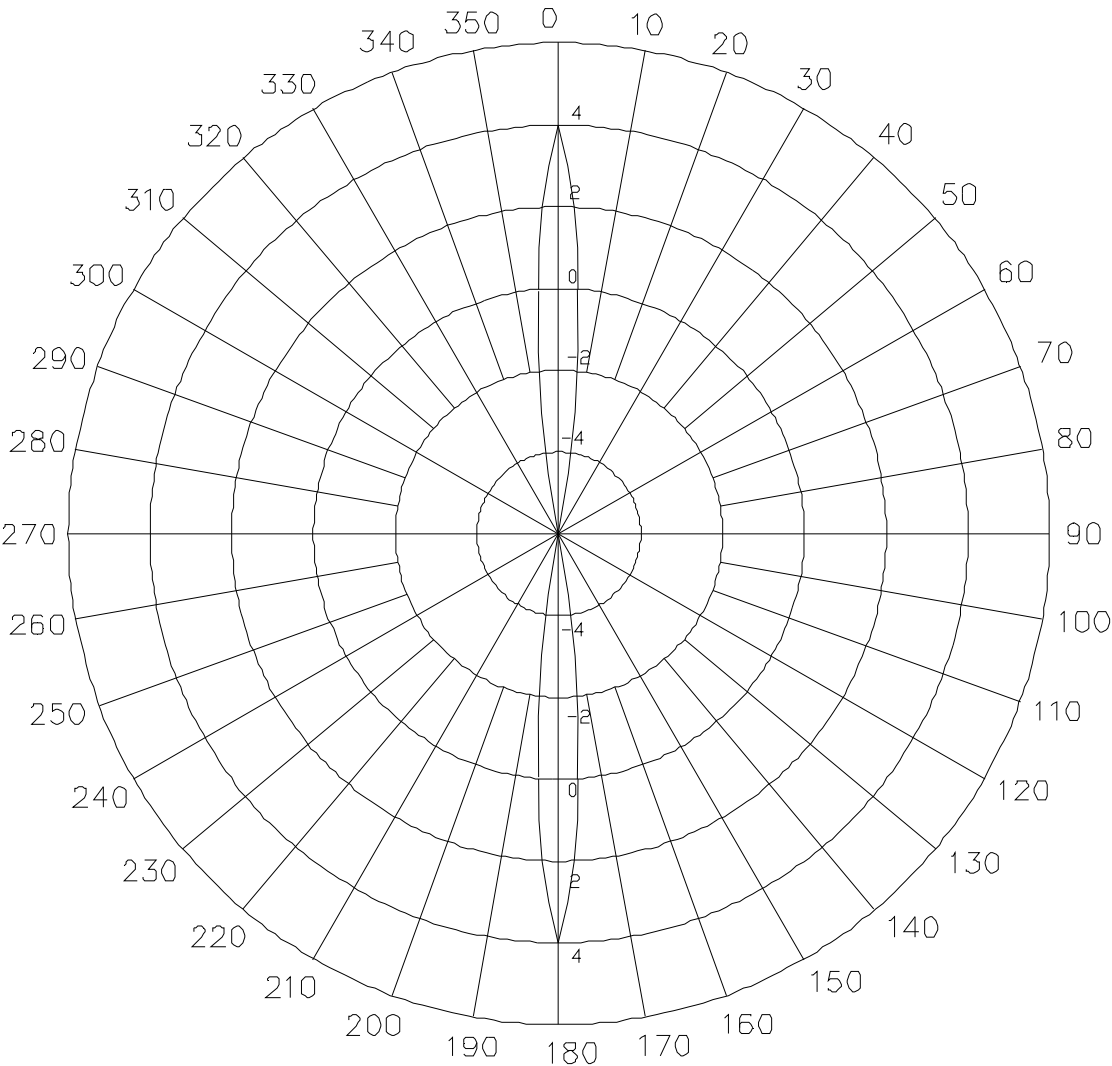


Omni Directional Antenna

for 802.11a/b/g Version 1

TH-2458A

H-PLANE FIELD PATTERNS for 5G

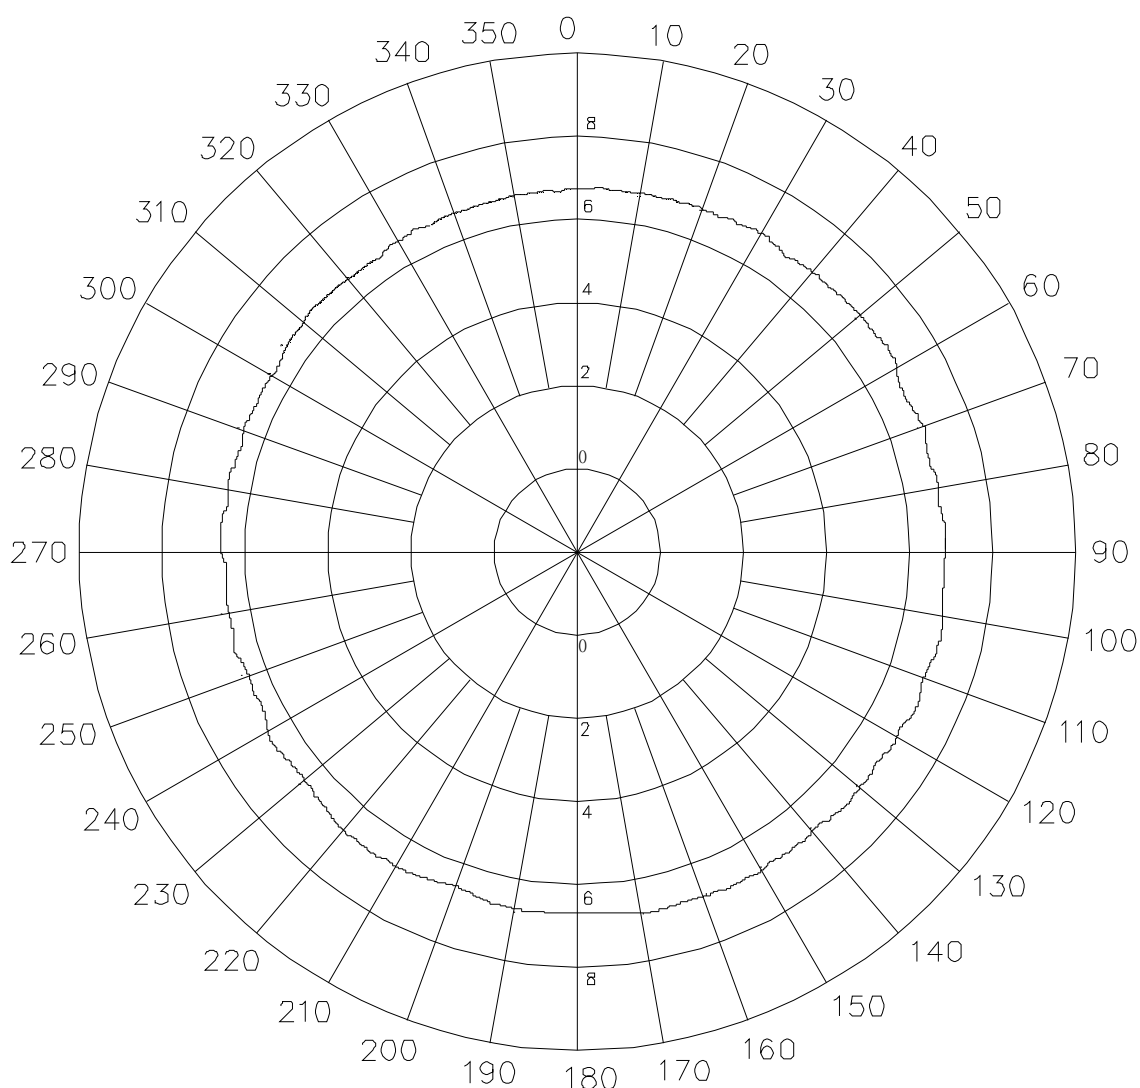


Omni Directional Antenna

for 802.11a/b/g Version 1

TH-2458A

E-PLANE FIELD PATTERNS for 5G

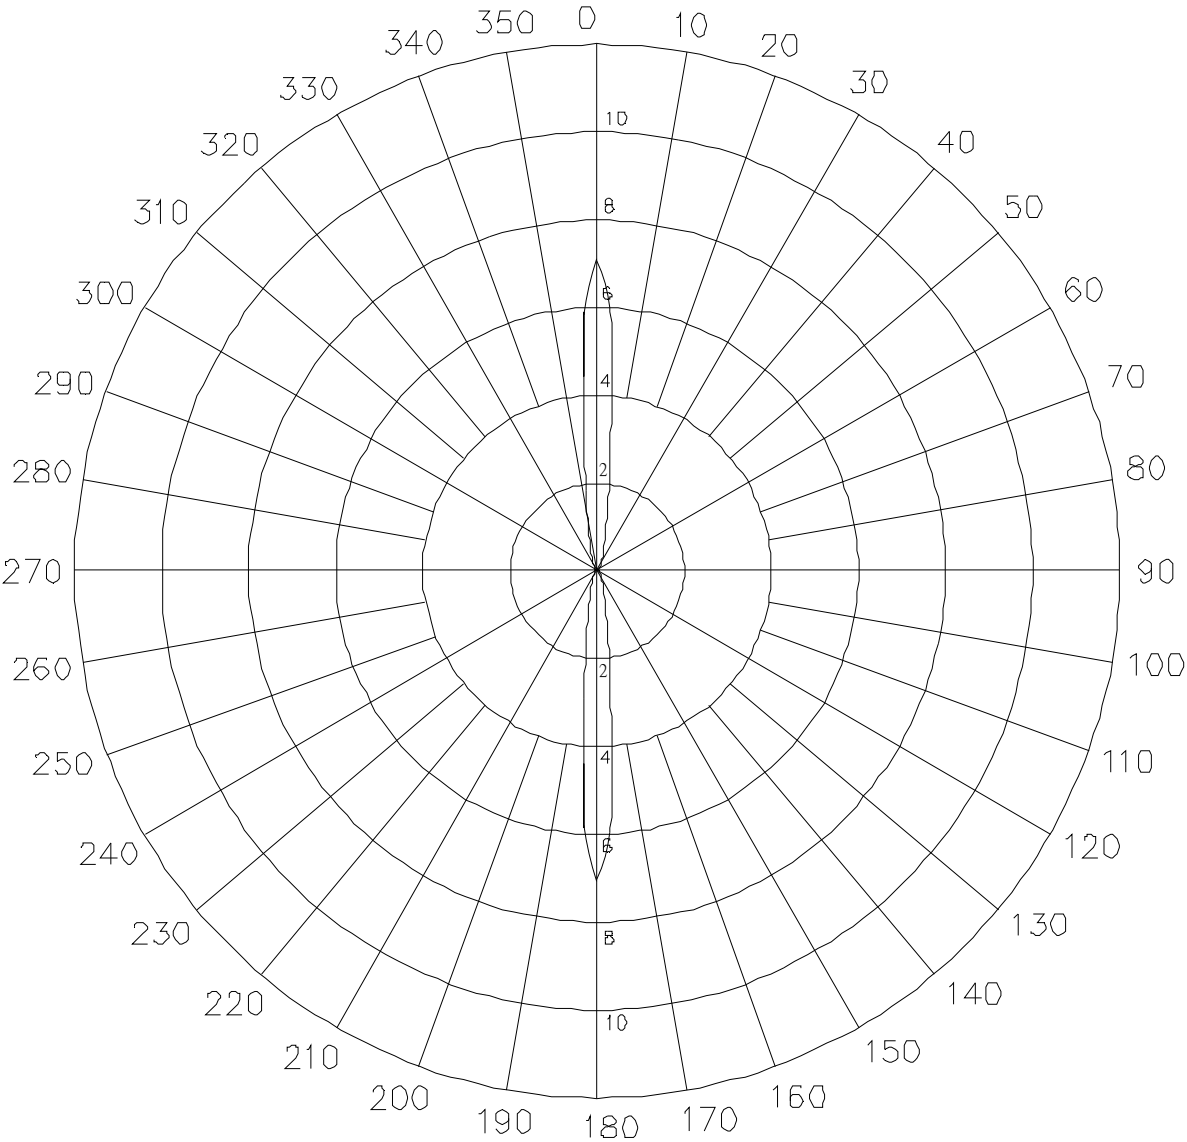

Omni Directional Antenna

for 802.11a/b/g Version 1

TH-2458A

