

Marine High Gain GPS/UHF Antenna

MODEL: GUA-620P

FOR Marine UHF Radio & GPS/GLONASS NAVIGATION SYSTEM



GPS antenna Specifications: GA62P

Specifications	
Antenna Element	
Center Frequency	1575.42 MHz +/-1.023 MHz
Polarization	R.H.C.P. (Right Handed Circular Polarization)
Absolute Gain @ Zenith	+5 dBi typical Based on 70×70mm ground plane
Gain @ 10° Elevation	-1 dBi typical
Axial Ratio	3 dB max.
Output VSWR	1.5:1 Typ.
Output Impedance	50 ohm
Low Noise Amplifier	
Center Frequency	1575.42 MHz +/- 1.023 MHz
Power Gain	38db(3V) / 45db(5V) (Without cable +25°C±10°C)
Bandwidth	10 MHz min.
Noise Figure	1.6 Typ.
Outer Band Attenuation	20 dB min. @ Fo +/-50 MHz
Supply Voltages	3.0~5.0V DC
Current Consumption	21mA@ 3.0V DC,25mA@ 5.0V DC
VSWR	1.5 max.
Output Impedance	50 ohm
Overall Performance: (antenna element, LNA & coax cable)	
Center Frequency	1575.42 MHz
Gain	38db(3V) / 45db(5V) (Without cable +25°C±10°C)
Noise Figure	2.0 max.
Bandwidth	10 MHz min.
Axial Ratio	3 dB max.
VSWR	1.5 max.
Output Impedance	50 ohm
Environmental Conditions	
Operating Temperature	-30°C to +80°C
Storage Temperature	-40°C to +100°C
Relative Humidity	40% to 95% non-condensing
Water Resistance	100% waterproof

Physical Constructions	
Dimensions	Antenna : 60mm(Dia.) × 18.5mm(H)
Weight	65 grams (without cable)
Standard Mounting	Bulkhead mount with 0.8 inch threaded wing nut (standard accessory).
Cable & Connector	
RF Connector	SMA(F) or TNC(F)
Cable Pulling strength	6 Kg @ 5sec. molded plastic on connector end for strain relief.

OUTSIDE UHF BASE ANTENNA

MODEL: MUA-100A



SPECIFICATION

一. ELECTRONICAL:

1. ANTENNA TYPE 天線型式: Base Antenna
2. FREQUENCY 頻率: 380~512MHz
3. IMPEDANCE 阻抗: 50 Ohm
4. POLARISATION 極: Verticle
5. SWR: 2.0:1
6. MAX.POWER 最大功率: 50W

二. MECHANICAL:


1. MATERIALS 材質: Fiber
2. COLOR 顏色: White
3. TOTAL HEIGHT 總長度: 910m/m ±10
4. WEIGHT 重量: 1050g



1. APPEARANCE:

NO.	NAME	Q. TY
01	Body	01
02	Cap	01
03	Stay ring(Stainless steel)	01
04	Round iron washer(Stainless steel)	01
05	Hexagonal nut(Stainless steel)	01
06	Clip retaining	02
07	U-Circlip(Stainless steel)	02
08	Hexagonal nut(Stainless steel)	02
09	Round iron washer(Stainless steel)	04
10	Hexagonal nut(Stainless steel)	04
11	Hexagonal plate hand	01
12	N (Female)	01

註:VSWR 1:2.0

 Third angle projection	CUSTOMER'S	MODEL	PARTS NUMBER	FREQUENCY	UNIT	SCALE	DATE	VERSION
				380-512Mhz	M/M		20111118	1
	TOLERANCE	X. XX±0. 15	NAME	PARTS NUMBER	APPROVED	CHECKED	DRAWING	DESIGNED
	SURFACE ROUGHNESS	S ▽▽	APPEARANCE					

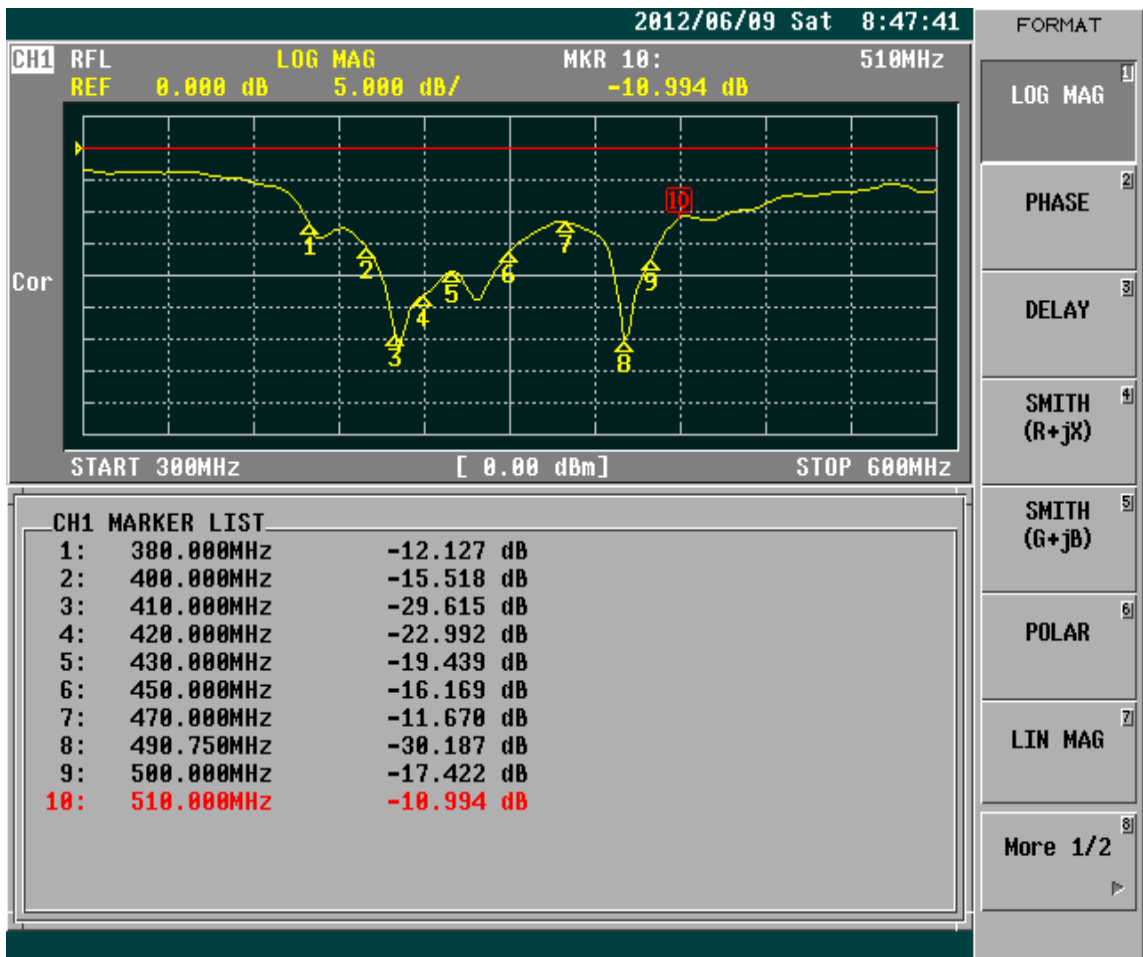

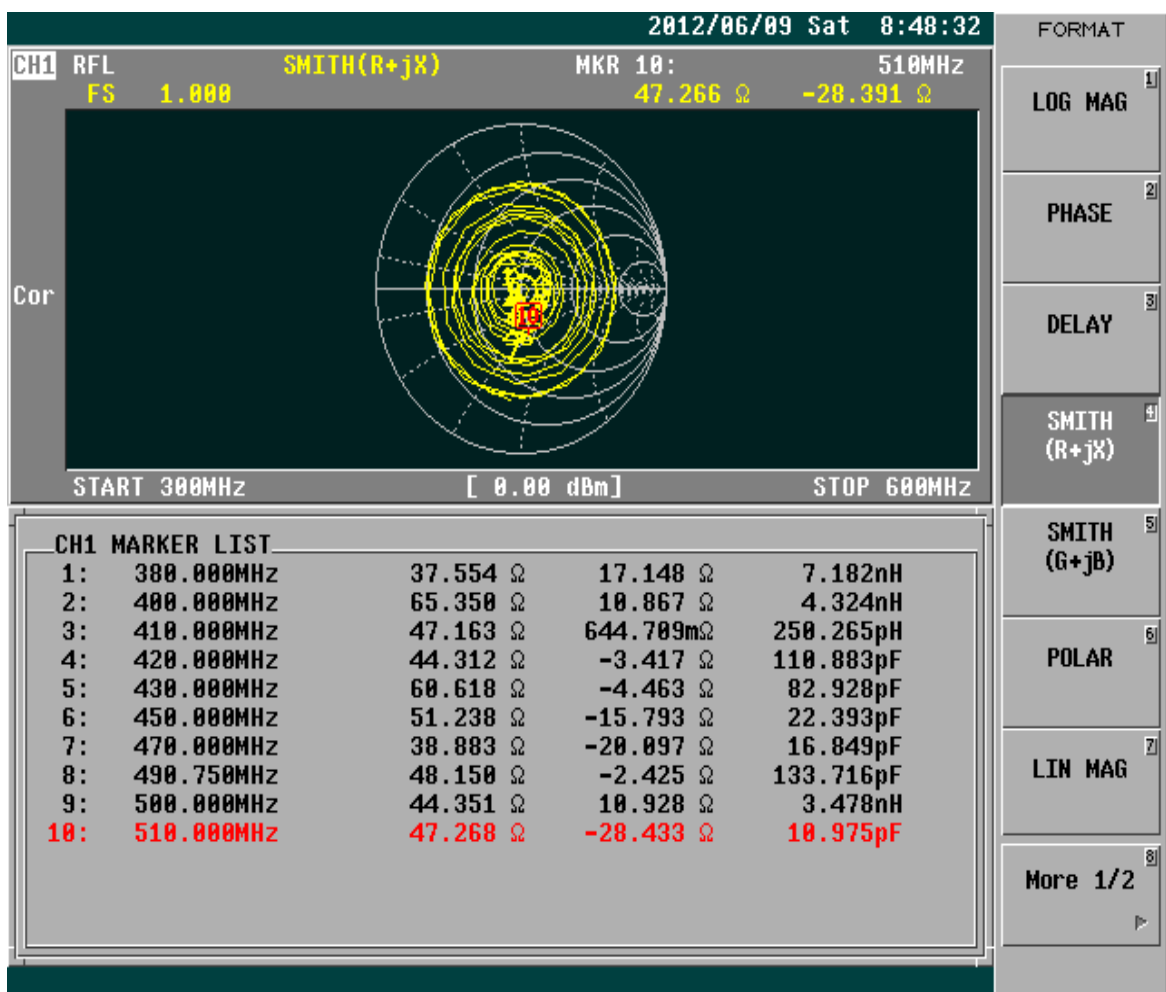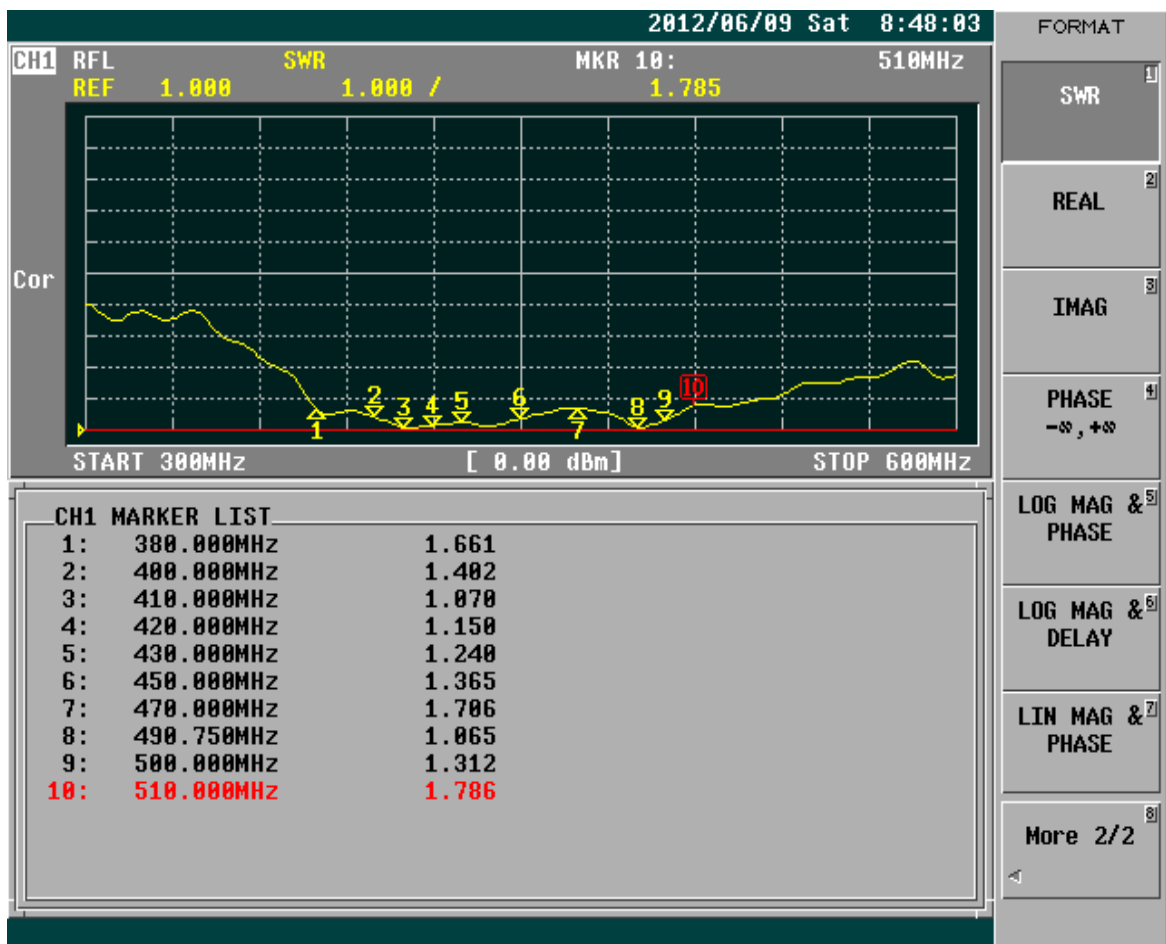

SUS L-Mounting

Madel : FB-6



Size :

